



**INTER  
NOVA**

PROFESSIONAL LIGHTING

IT ALL  
STARTS  
WITH LIGHT

since 1996

Dutch  
CRAFTSMANSHIP

# Lighting Solutions 2023



internova.nl



internova\_lighting



internova\_lighting

## OUR BRAND

At Internova, we plan and design professional LED lighting. Our main focus is in the retail and hospitality industry. As producers of light, we are proud of our broad selection of lighting products. We advise a lighting strategy based on LED modules, lumens, lighting colour and focal points. All our fixtures are made in The Netherlands. During the past 27 years, we have been part of many big hospitality and retail projects. Projects in collaboration with wholesalers and lighting specialists.

Our functional lighting is not only easy on the eye, but is designed with a purpose. Lighting not only has to contribute to the atmosphere, but it is also a part of the branding, routing and conversions. It takes more than just a set of lights and track to make it work. Lighting is a specialization, which makes it a real profession. And therefore; Internova

## PROFESSIONAL LIGHTING



*Dutch  
Craftmanship*

# IT ALL STARTS WITH LIGHT

Three different quotations were received for a stunning bar. An interior designer stuck to a drawing table, finally realized the perfect colour to put on the walls. Endless discussions were held about the right chairs. The interior of a store, restaurant or hotel has to be on point. The design of the establishment determines atmosphere and appearance. It is part of your brand. But what to do with the lighting? How do you incorporate this into your design, to contribute to perception and atmosphere? Have you ever really thought about this?

## NO LIGHT WITHOUT A PLAN





13. Liberta



15. Diabolo



16. Diabolo L



17. Veloce




19. Meteora - S



19. Meteora



45. Powergear



47. Powergear 48V



48. Lentiggini 48V



49. Sottile 48V



50. Banda 48V



51. Lucevaria System



21. Meteora-S  
Surface & Recessed



22. Meteora Surface



23. Meteora XL



25. I.Forza



26. Colibri



27. Variare



55. Dolina



56. Profonda



57. Giro DLM



58. Giro SLM



58. Tondo



59. Cerchio



27. Cambia



29. Figlio



30. Interno



30. Lungo



31. Baleno



35. Galleria



59. Cerchio L



60. Visione 360



61. Girevole



62. Occhio



63. Curva



64. Doblar



35. Presenta



37. Concentra



38. Vela



39. Tubulo




39. Guarda



40. Barista




65. Rondio



65. Quadro



66. Etna



67. Taleggio



67. Vittorio



69. Moon Retail



41. Il Podio



42. Fuga



42. Labarra



43. Luminosa



43. Linea 60/100



44. Lucevaria



71. Moon frame(less)



73. Luna frame(less)



75. Star frame(less)



79. Sottile 40 Due



80. Favo



80. Nuvola



81. Star Surface



82. Cubo up/down



83. Snello



84. Orizzonte



84. Lipari



87. Salina



88. Meteora pendant



89. Lucevaria Pendant



91. Alta



92. Riva



92. Roswell



### Utility That's where you want to work!

The right lighting in a utility environment contributes to the well-being of the employees and creates a pleasant working environment. Our lighting planners can build beautiful 3D lighting concepts according to the latest NEN standard, for the perfect office environment.



### Supermarket The volume can be increased!

A common mistake is the use of flat line lighting in a supermarket, which means that there is no atmosphere and a bad appearance. By creating the perfect balance between general lighting and spot lighting, our lighting designers can provide the right atmosphere. Also consider applying special lighting for fresh food and cosmetics! This makes a visit to these stores a pleasant experience which contributes to the increase of sales volumes.



### Showroom Don't be that simple!

Light creates atmosphere, branding, conversion and routing. Good showroom lighting does not consist of a simple combination of spots and tracks. For the right lighting, a well-thought-out lighting plan is essential. Internova designs and realizes customized (3D) lighting plans.



### Restaurant & Bar Make things happen!

In restaurants and bars, good lighting is not only important to create the perfect atmosphere, but must also be functional. By using the right combination of functional and decorative lighting a space can be brought to life.



### Shops Seductively illuminated!

If the layout of a shop changes, the lighting should always be easy to adjust. That is why Internova tracklights in combination with our flexible Powergear track system are perfect to use in any shop. Understand the art of seduction by creating a great product presentation using Internova's FASHION spot!



### Fresh Food That tastes like more, doesn't it?!

Where other LED food modules can cause food to perish (e.g. aging of fresh meat and fish) within a few hours, the Premium Food LED modules by Internova are suitable for lighting fresh food products without any issues. This is achieved by selecting the correct wavelength combinations within the LED chips, the fresh food is displayed in the best possible way: true-to-life colours and a tasteful look.



### Residential I have it at home myself!

Lighting is becoming increasingly important in residential projects and is becoming indispensable. The right lighting can determine the atmosphere of a home. With new additions to our program such as the compact 48V track system and the extensive Meteora serie we can provide the right solution for these projects.

## LIGHTING DEFINITIONS

In our product descriptions you will find a number of typical lighting definitions and symbols. We have summarized some of the most commonly used product features in accessible descriptions.

### LUMEN - *Output of luminous flux*

The amount of light output generated by a lightsource. The higher the lumen output, the higher the amount of light.

### CRI Ra - *Colour rendering index*

Indicates on a scale 0-100 how natural a light source can render true colours of illuminated objects and spaces. Natural daylight has a CRI of 100Ra.

### CCT - *Collocated Colour Temperature*

CCT is measured in degrees Kelvin (K) and indicates the colour appearance of the light source. Artificial light is mostly rated between 2200K and 5700K. The higher the temperature, the cooler the light.

### UGR - *Unified Glare Rating*

The UGR is the index that quantifies the discomfort glare. UGR is rated between 10 and 28 whereby 10 is very comfortable. Office lighting should always be lower than 19 (UGR <19)

## LED MODULES

Standard



Basic lighting module available in CRI >80Ra and >90Ra in 2700K, 3000K, 4000K, and 5700K.

Premium



Excellent quality of light and colour rendition, combined with high energy efficiency. Ideal for creating ambience, fresh whites and depth of colour in many retail environments. Premium White module available in CRI >80Ra and >90Ra in 3000K, 3500K and 4000K.

Food



LED modules dedicated towards fresh food applications.

Food WarmWhite Module: Enhances the appearance of fresh food, such as bread, fruit and vegetables. Food Premium Meat Module: Enhances the appearance of fresh meat. Fresh Fish Module: Enhances the appearance of fresh fish.

DTW



Dim-to-Warm is a technology that reduces a luminaire's colour temperature when being (phase) dimmed, from 3000K to 2200K. This makes our Dim-to-Warm fixtures ideal to use in domestic and hospitality projects and gives the feeling of cosy halogen lamps.

TW



Tunable White allows you to control the colour temperature of a fixture between 2500K and 7000K. Our Tunable White fixtures can be controlled using the user friendly Casambi app or via DALI.

CRI98



Full Spectrum CRI >98Ra. The high fidelity spectral output of our Full Spectrum modules creates stunning environments with the best possible natural and vivid colour rendering. Available in 3000K and 4000K.

HE+



The new High Efficiency+ Fortimo SLM G7 LED Modules provide >15% more efficiency (Lm/W) in comparison to our standard CRI90 modules without compromising on reliability or quality of light.

## OPTIONS

Dimmable



Dimmable



Dimmable



Honeycomb



Glass



Casambi



Emergency unit



**TRIAC** - A switch that is used to control power by phase cutting. When used in lighting applications, it's commonly referred to as Triac dimming.

**DALI** - Protocol of controlling the luminaire whereby a data signal can control each driver individually.

**1-10V** - the driver generates an analogue signal of 1V (minimum) to 10V maximum, which reaches the dimmer switch (potentiometer) which modulates it.



This is an interactive catalogue: the products can be found quickly and easily by scanning the **QR codes**. With every product you can find a QR code which can be scanned with the camera on your mobile phone. After following the link you will be redirected to the relevant product on our website.



# TRACKLIGHTS

Our track lighting is extremely flexible and versatile. You can choose from a variety of different designs and lighting options. All of them equipped with the latest generation LED- and smart- technology. Combine these Made-in-Holland tracklights with our Powergear® 3-circuit track for the perfect flexible solution for any project and industry.



# LIBERTA




Aluminium 3-phase tracklight equipped with Philips Fortimo LED module and Philips Xitanium LED driver. Due to its unique double hinged design the Libertà provides you with the maximum freedom in each project. You can use the tracklight both for direct and indirect (up)lighting.

**Lumen** : 1100lm, 2000lm, 3000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K

Colour





Beam angle



Led modules



Options



# LIBERTA

## MAXIMUM FLEXIBILITY





# DIABLO


Aluminium 3-phase tracklight equipped with Philips Fortimo LED module and Philips Xitanium in-track LED driver.

**Lumen : 1100lm, 2000lm, 3000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**

Colour




Beam angle



Led modules



Options



# DIABLO-L

Powerful aluminium 3-phase tracklight equipped with Philips Fortimo LED module and Philips Xitanium in-track LED driver.

**Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 5500lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**

Colour




Beam angle



Led modules



Options



# VELOOCE



Aluminium 3-phase tracklight. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium in-track LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm, 4000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K

Colour





Beam angle



Led modules



Options

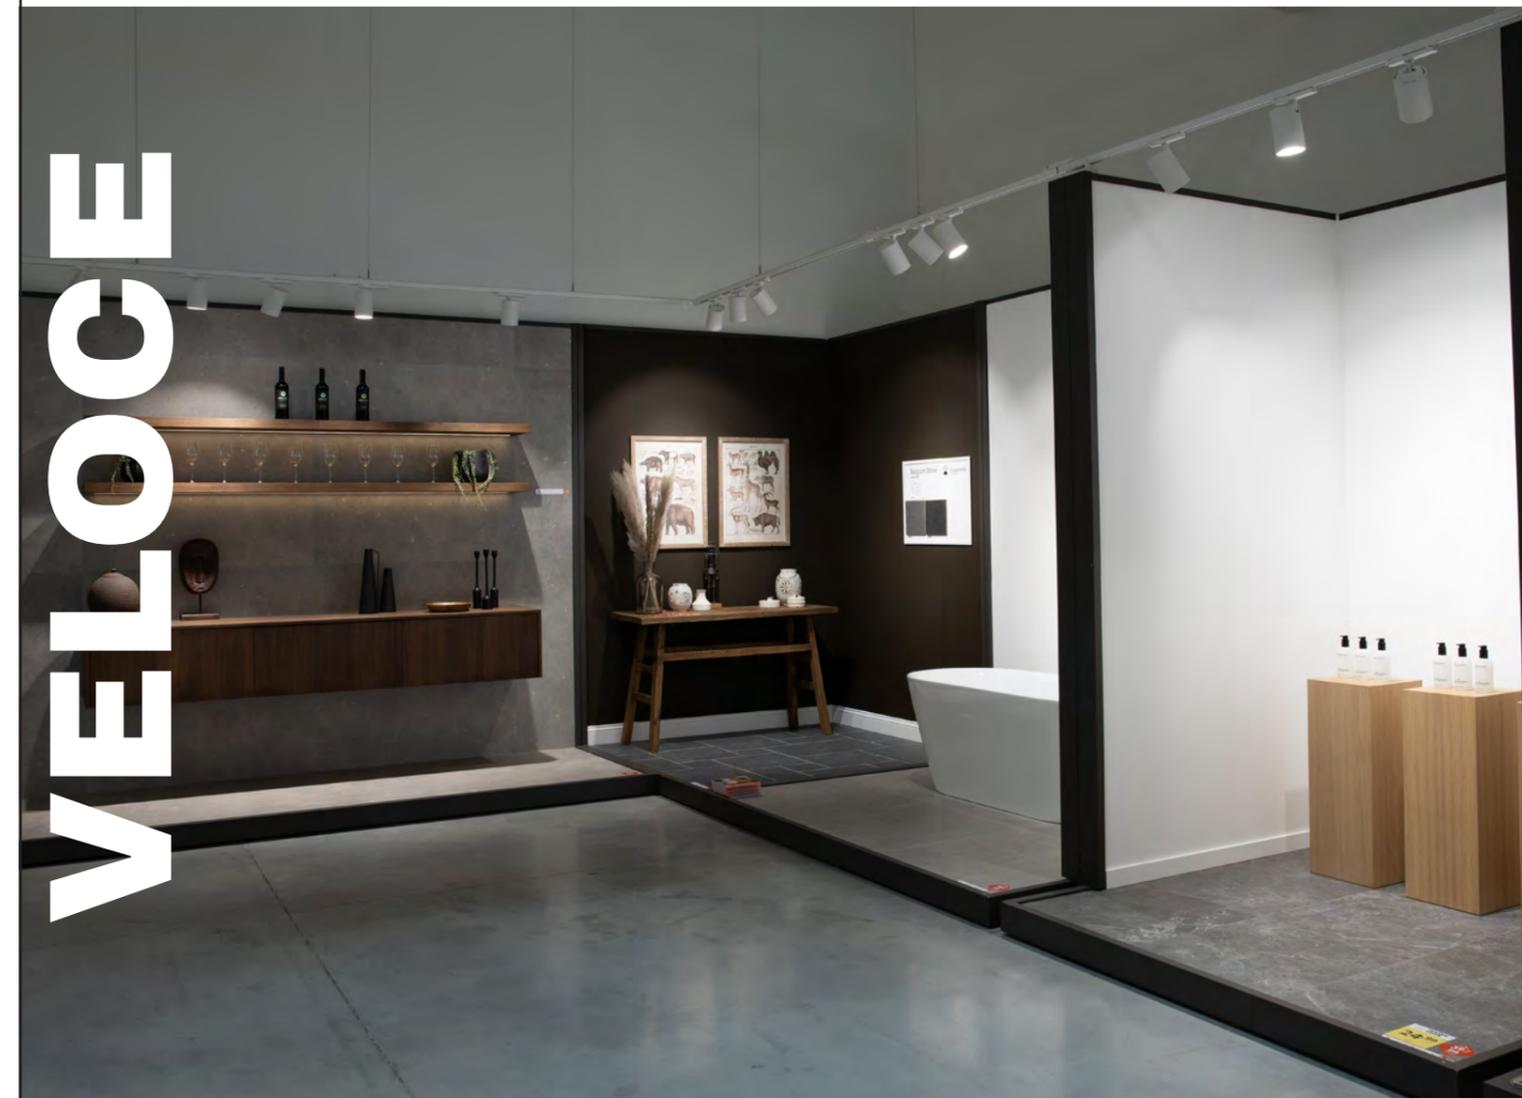


# VELOOCE

# METEORA-S



Compact aluminium 3-phase tracklight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

**Lumen** : 2700K 700lm, DTW 500lm  
**CRI** : >90Ra  
**CCT** : 2700K, DTW (3000K - 2000K)




# METEORA



Compact aluminium 3-phase tracklight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality projects.

**Lumen** : 1100lm  
**CRI** : >90Ra  
**CCT** : 2700K, 3000K, DTW (3000K - 2000K)



METEORA PENDANT:  
page 91

- Standard
- Dimmable
  - TRIAC
- Colour
  - White
  - Black
- Beam angle
  - Lens 15°
  - Lens 24°
  - Lens 40°
- Led modules
  - Standard
  - DTW
- Options
  - Dimmable
  - Casambi
  - DALI

## METEORA-S

## METEORA



**Choose  
your  
inner  
ring.**



# METEORA - S

## SEMI-RECESSED



Compact semi-recessed spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

**Lumen** : 2700K 700lm, DTW 500lm  
**CRI** : >90Ra  
**CCT** : 2700K, DTW (3000K - 2000K)

Cut-out size semi recessed:  
 Ø70 x 45mm



# METEORA - S

## SURFACE



Compact aluminium spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

**Lumen** : 2700K 700lm, DTW 500lm  
**CRI** : >90Ra  
**CCT** : 2700K, DTW (3000K - 2000K)

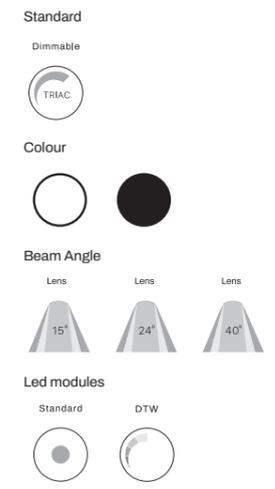



# METEORA

## SURFACE



Compact aluminium surface mounted spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality projects.

**Lumen** : 1100lm  
**CRI** : >90Ra  
**CCT** : 2700K, 3000K

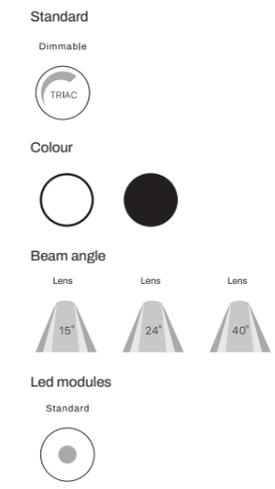

# METEORA-XL




3-Phase tracklight with built-in LED driver and aluminium die-cast heatsink. Powder coating finish. Available with a golden, black or white inner ring. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen : 1100lm, 2000lm, 3000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**


Colour




Beam angle



Led modules



Options



**Choose your inner ring.**

# METEORA-XL



# I.FORZA



Colour

Beam angle


Reflector

Led modules

Options

3-Phase tracklight with built-in LED driver and aluminium die-cast heatsink. Suitable for high lumenflux up to 4500lm. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen : 1100lm, 2000lm, 3000lm, 4500lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**



# COLIBRI



Colour

Beam angle


Reflector

Led modules

Options

Compact aluminium 3-phase tracklight. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium in-track LED driver.

**Lumen : 1100lm, 2000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**



# VARIARE



Aluminium 3-phase tracklight in powder coating finish with adjustable beamangle (8-30°). Equipped with unique Powergear Ultimate Adapter® with built-in LED driver. Ideal for museum and exposition lighting.

**Lumen : 900lm**  
**CRI : >90Ra**  
**CCT : 2700K, 3000K**

# CAMBIA



Aluminium 3-phase tracklight in powder coating finish with adjustable beamangle (10-60°). Equipped with Powergear Ultimate Adapter® with built-in driver.

**Lumen : 1100lm, 2000lm**  
**CRI : >90Ra**  
**CCT : 3000K**

- Colour
  - White
  - Black
- Beam angle
  - Lens
  - 8-30°
- Led modules
  - Standard
- Options
  - Dimmable
    - DALI
  - Casambi
  - On-board dimming



Beautiful works of art deserve the right **attention.**




# FIGLIO

- Colour**
- Beam angle**
- Led modules**
- Options**

Compact 3-Phase tracklight with built-in driver. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen : 1100lm, 2000lm, 2500lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**




# INTERNO LUNGO



Tubular 3-Phase tracklight with built-in LED driver and aluminium die-cast heatsink. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.


**Lumen : 1100lm, 2000lm, 3000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**



- Colour**
- Beam angle**
- Led modules**
- Options**

Tubular 3-Phase tracklight with built-in LED driver and aluminium die-cast heatsink. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen : 1100lm, 2000lm, 3000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**



# BALENO



Aluminium 3-phase tracklight, available in a RGBWW and TW version, CRI>90. With this tracklight it is possible to create a Human Centric Lighting environment. The Baleno can be supplied as a DALI DT-8 or Casambi controllable version.

**Lumen : 3000lm**  
**CRI : >90Ra**

**Available in:**  
**-RGBWW (RGBW + 2500-7000K)**  
**-TW (2500-7000K)**

Colour



Beam angle



Options



RGBWW: Colours can vary like a rainbow; from light green, deep blue to dark red. But also neutral white (CRI90) is available.

TW: Tunable White, with this function the light can vary from 2500K (extra warm white) to 7000K (daylight). Also known as Human Centric Lighting whereby the colour of the light simulates the day light cycle (Sunrise, Noon, Sunset).

## Casambi

Casambi is a bluetooth low energy lighting solution. A large number of our fixtures can be equipped with the Casambi option. All Casambi products automatically form a wireless mesh network. It can be controlled by smartphones, tablets or smart watches. The Casambi App can be downloaded for free in the App store. With Casambi you can:

- Dim the lighting\*
- Group luminaires and control them together
- Configure, save and recall scenes
- Adjust light colours\*
- Adjust colour temperatures\*
- Take pictures and add lighting control directly to your picture
- Defining timers for the purpose of Human Centric Lighting\*

\* Fixtures have to be equipped with this feature





## Made in Holland

We are designers with technical knowledge and know better than anyone how light works. The difference is made by the perfect combination of the right luminaire, LED modules, lumen-output, light colours and focal points. We have all the craft and knowledge in house to convert concepts into unique custom-made lighting solutions. All Internova luminaires are assembled in the Netherlands. We keep the production process in our own hands, therefore we are extremely flexible and we guarantee quality and pure craftsmanship.




Producers of light.



## No light without a plan

Light creates atmosphere, branding, conversion and routing. Good lighting does not consist of a simple combination of spots and tracks. For the right lighting, a well-thought-out lighting plan is essential. Internova designs customized (3D) lighting plans for our partners.

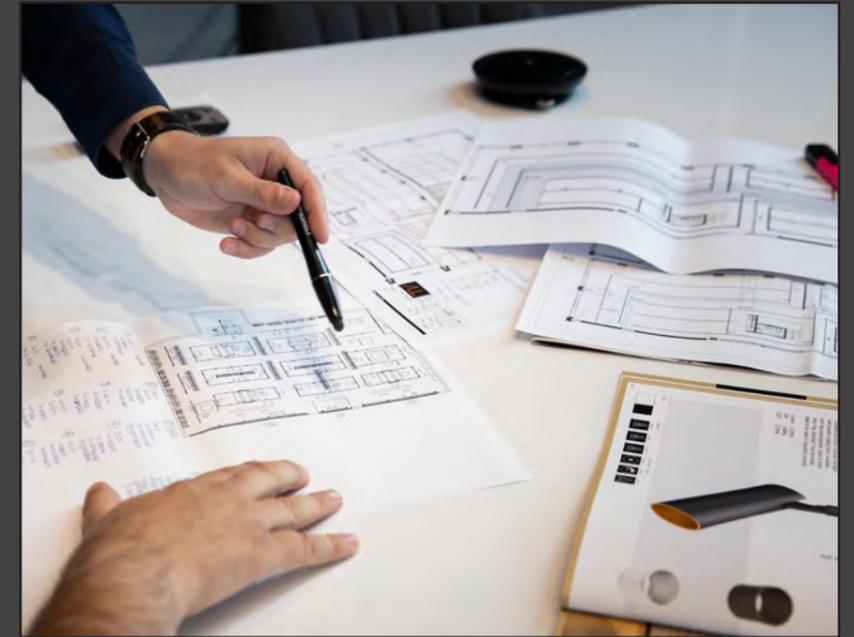


# GALLERIA



Compact 3-phase aluminium tracklight with passive cooling body and driverbox. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K

- Colour
- -
- Beam angle
- Reflector
  - Reflector
  - Reflector
- 15° 24° 40°
- Led modules
- Standard
  - Premium
  - HE+
- Options
- Dimmable
  - Casambi




# PRESENTA



3-Phase aluminium tracklight with industrial look and separate driverbox. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K

- Colour
- - 
  -
- Beam angle
- Reflector
  - Reflector
  - Reflector
  - Reflector
- 15° 24° 40° 60°
- Led modules
- Standard
  - Premium
  - Food
  - DTW
  - CRI 98
  - HE+
- Options
- Dimmable
  - Dimmable
  - Dimmable
  - Casambi
  - Glass
  - Honeycomb




# CONCENTRA



- Colour:
- Beam angle:
  - Reflector 15°
  - Reflector 24°
  - Reflector 40°
  - Reflector 60°
- Led modules:
  - Standard
  - Premium
  - Food
  - DTW
  - CRI 98
  - HE+
- Options:
  - Dimmable (TRIAC)
  - Dimmable (DALI)
  - Dimmable (1-10V)
  - Casambi
  - Glass
  - Honeycomb

3-Phase aluminium tracklight with industrial look and separate driverbox. Powder coating finish. Suitable for high lumenflux, up to 6000lm. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**




# VELA



- Colour:
- Beam angle:
  - Reflector 70°
- Led modules:
  - Standard
  - Premium
  - Food
  - HE+
  - CRI 98
- Options:
  - Dimmable (DALI)
  - Casambi

3-Phase track Wallwasher with a very wide beamangle. Ideal for lighting wall presentations. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen : 1100lm, 2000lm, 3000lm, 4500lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**



# TUBULO




Colour



Simple and sleek 3-phase track spot with GU10 lampholder. Suitable for GU10 LED spot. Powder coating finish.

**Supplied without lightsource.**



# GUARDA




Colour




Vintage theatre-look 3-phase tracklight with GU10 lampholder. Supplied including barn doors. Suitable for GU10 LED spot.

**Supplied without lightsource.**



# BARISTA

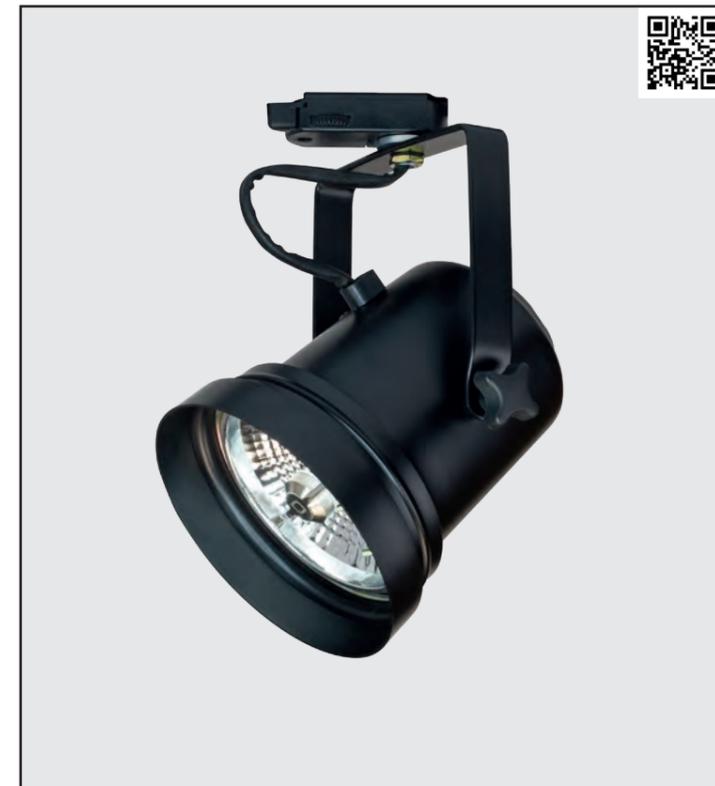

Colour



Options

Dimmable




Casambi



Vintage 3-phase tracklight with G53 lampholder. Suitable for AR111 LED spot. Supplied including 350mA Triac dimmable LED driver. The perfect spot for hospitality projects.

**Lightsource advice: Optiled Array AR111 927/DTW 800lm (as shown on the product picture).**



# IL PODIO



- Colour**
- 
- Beam angle**
- Reflector 15°
  - Reflector 24°
  - Reflector 40°
  - Reflector 60°
- Led modules**
- Standard
  - Premium
  - Food
  - CRI 98
  - HE+
  - DTW
- Options**
- Dimmable TRIAC
  - Dimmable DALI
  - Casambi
  - Glass
  - Honeycomb

Theatre-look 3-phase tracklight with built-in LED driver and aluminium die-cast heatsink. Powder coating finish. Supplied including barn doors. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen : 1100lm, 2000lm, 3000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**

# FUGA



- Colour**
- -
- Emergency Lighting**
- ⚡

Compact track mounted emergency light. Easy and quick to install due to the incorporated 3-circuit track adapter.

- **Non maintained**
- **Self-test**
- **Symmetrical lens**

**Lumen : 200lm**  
**CCT : 4000K**  
**Autonomy : 1h emergency**  
**Charge time : 24h**

# LABARRA



- Colour**
- -
- Beam angle**
- Lens 30°
  - Lens 60°
  - Lens 90°
- Led modules**
- Standard
- Options**
- Casambi

Aluminium linear 3-phase tracklight with high lumen output. Powder coating finish. Ideal to be used in high space and warehouses. Equipped with Osram LED modules and driver.

**Lumen : 4500lm, 6000lm, 9000lm, 14000lm**  
**CRI : >80Ra**  
**CCT : 3000K, 4000K**

# LUMINOSA

TRACK / SURFACE



- Colour:
- Beam angle:
- Lens:
- Led modules:
- Options:

Linear light available in surface mounted and 3-phase track version. Can be equipped with a wide variety high efficiency lenses. The surface mounted version can easily be installed due to the use of magnets. Through-wiring available upon request. Equipped with Osram LED modules and driver.

1140mm : 4500lm, 6000lm  
 1700mm : 6000lm, 9000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 3000K, 4000K, 5000K, 6500K

# LINEA

60 / 100



- Colour:
- Beam angle:
- Led modules:


Linear LED fixture with a 3-phase track connection. Ideally suited for general lighting. Equipped with opal diffusor.

**Lumen** : (Linea 60) 2200lm / (Linea 100) 3200lm  
**CRI** : >80Ra  
**CCT** : 3000K / 4000K / 5700K Switchable



# LUCEVARIA

TRACK

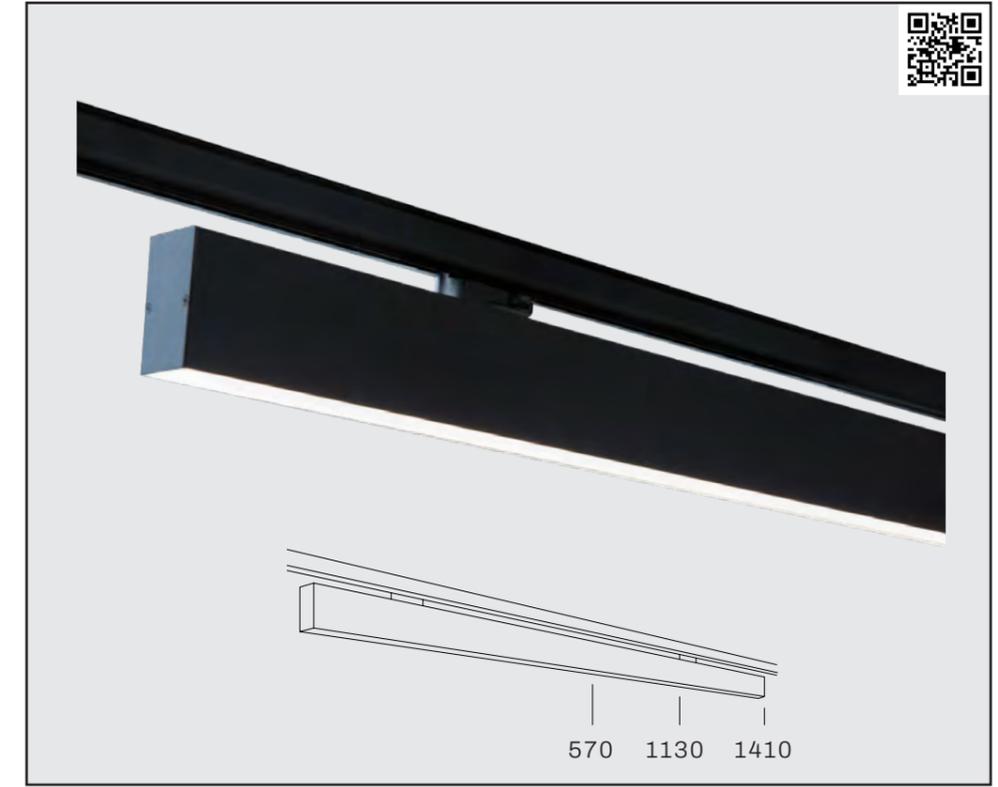

- Colour:
- Beam angle:
- Led modules:
- Options:

Linear LED profile (45x78mm) for 3-phase track with a opal diffusor. Equipped with Osram LED modules and driver.

**570mm** : 1500lm  
**1130mm** : 3000lm  
**1410mm** : 3850lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 3000K, 4000K, 5000K, 6500K




**POWERGEAR®**  
3-PHASE TRACK



**3-PHASE TRACK**

1 meter PRO-0410  
2 meter PRO-0420  
3 meter PRO-0430



**3-PHASE TRACK RECESSED**

1 meter PRO-R410  
2 meter PRO-R420  
3 meter PRO-R430

Colour



Connector Left  
PRO-0431L



Connector Right  
PRO-0431R



Coupler  
PRO-0433



Adjustable L-connector  
PRO-M438



Adjustable T-connector  
Right  
PRO-M436R



Adjustable T-connector  
Left  
PRO-M436L



Middle Connector  
PRO-0434



Adjustable connector  
PRO-M435



X-connector  
PRO-0437



Mounting clamp  
PRO-04SK



Suspension kit with  
5m wire  
PRO-EZ0449



3-Phase track  
adapter  
PRO-0222



Fixed monopoint  
3-phase  
PRO-C100



Suspension  
clamp  
PRO-0418SK



T-bar EZCLICK  
PRO-M146T



End cap  
PRO-0432



Schuko adapter  
PRO-4230V




**POWERGEAR®**  
3-PHASE DALI TRACK



*On the right track*

**3-PHASE DALI TRACK**

1 meter PRO-0610  
2 meter PRO-0620  
3 meter PRO-0630



**3-PHASE DALI RECESSED**

1 meter PRO-R610  
2 meter PRO-R620  
3 meter PRO-R630

Colour



DALI Connector  
Right  
PRO-D631R



DALI Connector  
Left  
PRO-D631L




DALI Coupler  
PRO-D633



DALI L-connector  
Left  
PRO-D635L



DALI L-connector  
Right  
PRO-D635R



DALI T-connector  
Right  
PRO-D636R1



DALI T-connector  
Left  
PRO-D636L1



DALI T-connector  
Right  
PRO-D636R2



DALI T-connector  
Left  
PRO-D636L2



DALI Middle  
Connector  
PRO-D634



DALI Flexible  
Connector  
PRO-D639



DALI X-connector  
PRO-D637



DALI Track  
adapter  
PRO-D680

Request our  
**Powergear**  
**brochure**  
for the full  
track program.

# POWERGEAR®

## 48V Low voltage track system



The high quality Powergear 48V lighting track system for the professional lighting market is suitable for tracklights with Powergear 48V adapters. Specially designed for high-end (domestic) market due to its slim and subtle look. A comprehensive range of innovative accessories and a multitude of different adapters, give designers maximum freedom to create unique and smart 48V lighting designs. Powergear 48V lighting track comes in various surface mounted and recessed versions. The "EZCLICK" mounting features complete the system and make the track system quick and easy to install.

Low Voltage Single Circuit DALI




48V 15A Max.


Colour





Request our Powergear brochure for the full 48V program.

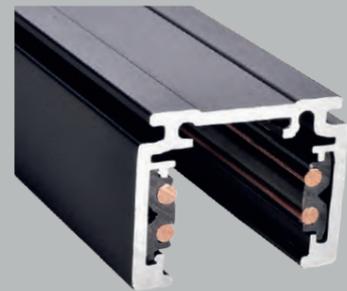


SURFACE MOUNTED TRACK



SURFACE MOUNTED DEEP TRACK

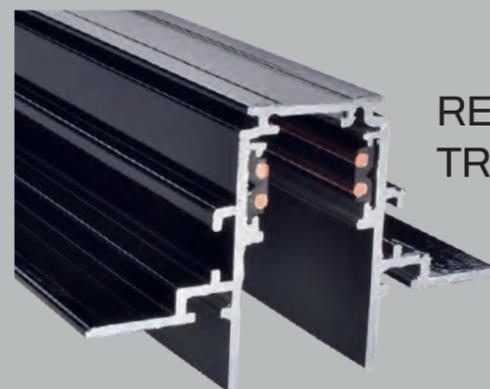

RECESSED TRACK

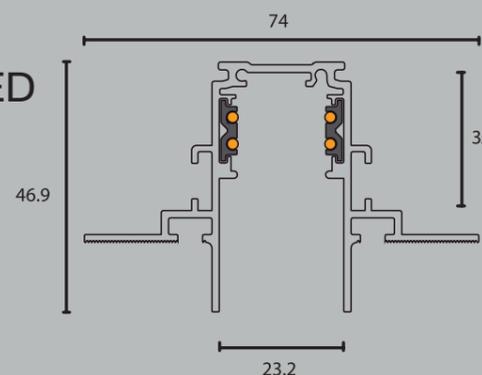

*Tailormade solutions*



# SALINA 48V

Decorative pendant in powder coating finish. Available in black (golden inner ring) and white (black inner ring). Only compatible with the Powergear® 48V system. Ideal to be used in domestic and hospitality projects.

Lumen : 600lm  
CRI : >90Ra  
CCT : 2700K



# LENTIGGINI

Linear lighting for Powergear 48V.  
Low UGR due to dark-light reflector.

Lumen : 900lm  
CRI : >90Ra  
CCT : 2700K, 3000K

Colour




Beam angle

Reflector



Options

Dimmable

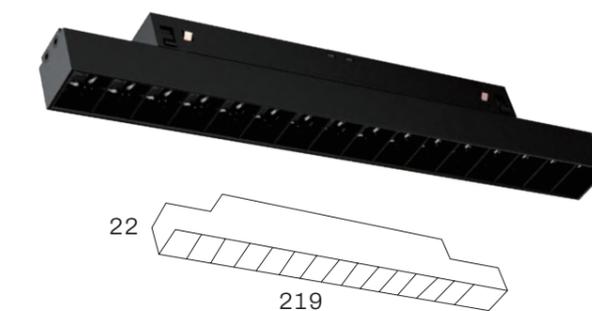

# SOTTILE 25



Lumen : 210lm  
CRI : >90Ra  
CCT : 2700K, 3000K

# SOTTILE 40



Lumen : 670lm  
CRI : >90Ra  
CCT : 2700K, 3000K

# SOTTILE 50



Lumen : 910lm  
CRI : >90Ra  
CCT : 2700K, 3000K

Choose your inner ring.

## Sottile serie:

Highly compact aluminium 48V tracklights. Only compatible with the Powergear® 48V system. Ideal to be used in high-end domestic and hospitality projects. Available with decorative golden, black or white inner ring. When using the Sottile spots in combination with deep- or recessed 48V track we advice to work with the Extension Rod.



Colour



Beam angle



Led modules

Standard



Options

Dimmable



# BANDA 25



Lumen : 300lm  
CRI : >90Ra  
CCT : 2700K, 3000K

# BANDA 75



Lumen : 890lm  
CRI : >90Ra  
CCT : 2700K, 3000K


# BANDA 50



Lumen : 600lm  
CRI : >90Ra  
CCT : 2700K, 3000K

## Banda serie:

Linear light with opal diffusor for Powergear 48V track system. Ideal to be used for general lighting in combination with our Sottile spot light series.

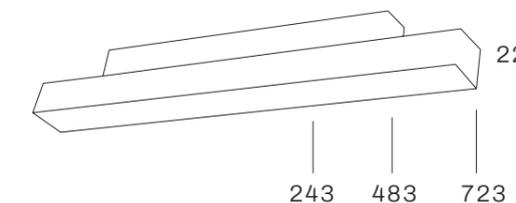

Colour



Led modules

Standard



Options

Dimmable



## LUCEVARIA SYSTEM

Design and multi-funtionality in one smart solution. To be used as pendant or surface mounted lighting. Linear lighting combined with spot lights for state of the art Lighting design. Powder coating finish. Equipped with OSRAM LED Module and driver.

Modular lighting system can be composed with following parts:




- Aluminium Profile (45x78mm) with a length of 1410mm, 1130mm or 570mm
- Various accessories available, see next page
- Available with blind cover, opal diffuser and blind cover with spots.

### Linear Lighting



1410mm		3850 lumen
1130mm		3000 lumen
570mm		1500 lumen

Specific lumen output upon request.

CCT : 3000K, 4000K  
CRI : >80Ra, >90Ra




### Spot Lighting


1410mm		4x spot
1130mm		3x spot
570mm		2x spot

Lumen : 1100lm, 2000lm  
CCT : 2700K, 3000K, 4000K  
CRI : >80Ra, >90Ra




### No Lighting (blind cover)

1410mm	
1130mm	
570mm	

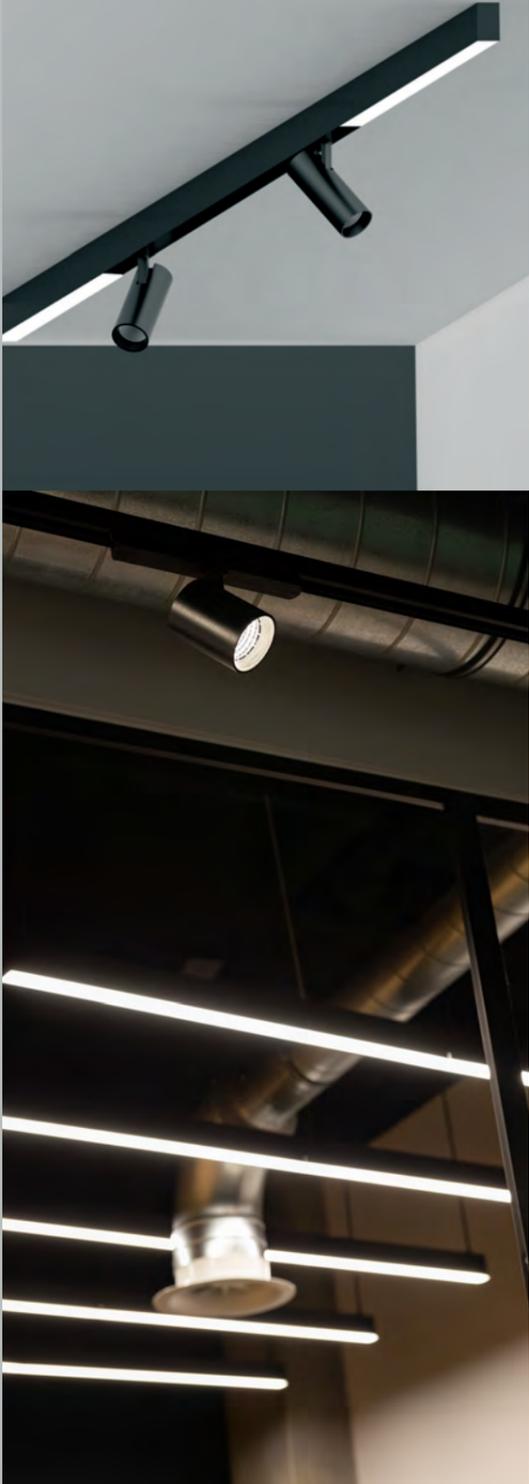


# LUCEVARIA MODULAR SYSTEM

Opal diffuser  
1410mm, 1130mm, 570mm



Blind cover  
1410mm, 1130mm, 570mm



Suspension kit  
3m including 230V cable



Suspension kit  
3m steel cable




Coupler



End cap



Corner 90°



T junction





# RECESSED

Recessed LED luminaires to be used in false- or T-bar-ceilings. Made-in-Holland and equipped with the latest LED and smart dimming technology. Highly suitable for retail, hospitality, residential and utility projects.




# DOLINA

FRAMELESS



Tiltable recessed frameless fixture with deep reflector. 350° turnable and 30° tiltable. Standard Triac dimmable. Also available with gold, white or black inner and outer ring. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 800lm, 1400lm  
**CRI** : >80Ra, 90Ra  
**CCT** : 2700K, 3000K, 4000K  
**Cut-out size** : Ø100 x H97mm




# DOLINA



Tiltable recessed fixture with deep reflector. 350° turnable and 30° tiltable. Standard Triac dimmable. Also available with gold, white or black inner and outer ring. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 800lm, 1400lm  
**CRI** : >80Ra, 90Ra  
**CCT** : 2700K, 3000K, 4000K  
**Cut-out size** : Ø90 x H97mm



Standard

Dimmable



Colour



Beam angle



Led modules

Standard



Options



**Choose your inner ring.**

# PROFONDA



Tiltable recessed spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

**Lumen** : 2700K 700lm, DTW 500lm  
**CRI** : >90Ra  
**CCT** : 2700K, DTW (3000K - 2000K)  
**Cut-out size** : Ø83 x H85mm

Standard


Dimmable



Colour



Beam angle



Led modules

Standard



Options



Ø 90



Ø 40



# GIRO DLM


180 / 206 / 226



- Colour
  - 
  -
- Beam angle
  -
- Reflector
  -
- Led modules
  -
- Options
  - 
  - 
  - 
  - 
  -

Economic LED downlight equipped with a Philips Downlight Module. Available in 3 sizes: 180mm, 206mm and 226mm. IP44 set with frontglass available upon request. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm  
**CRI** : >80Ra  
**CCT** : 3000K, 4000K  
**Cut-out sizes** : Giro 180 Ø170 x H130mm  
 Giro 206 Ø190 x H132mm  
 Giro 226 Ø215 x H137mm

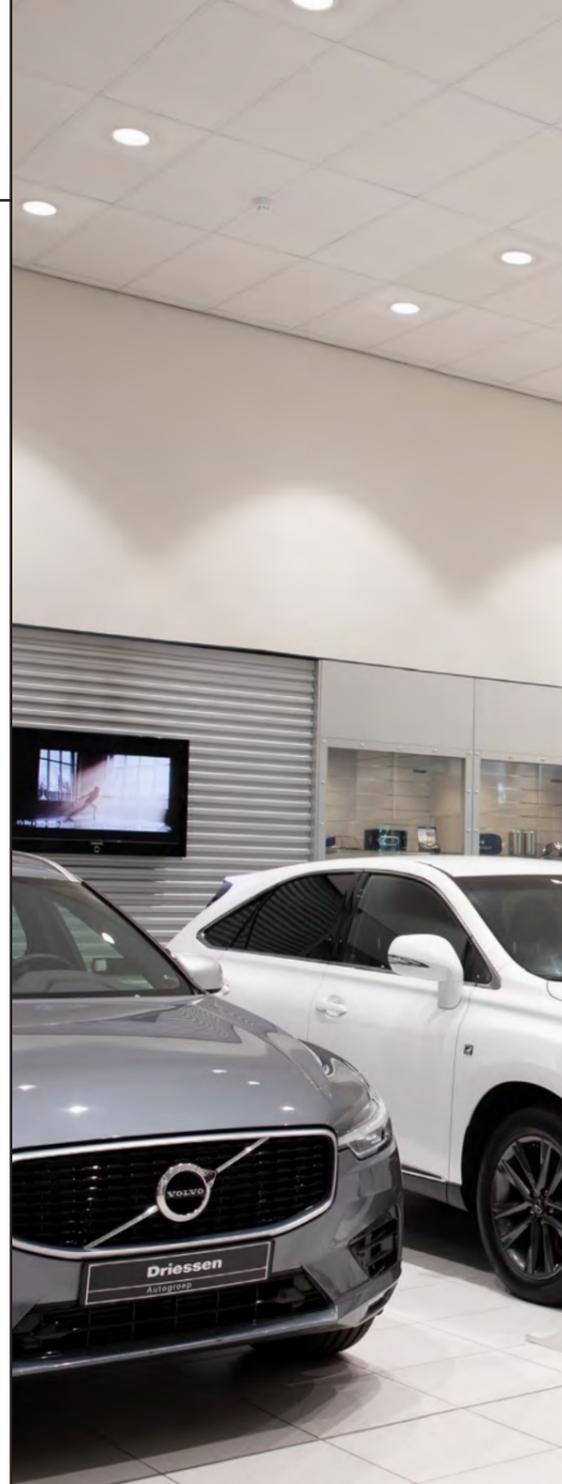

# GIRO SLM

180 / 206 / 226



- Colour
  - 
  -
- Beam angle
  -
- Reflector
  -
- Led modules
  - 
  - 
  - 
  - 
  - 
  - 
  -
- Options
  - 
  - 
  - 
  - 
  -

Highly efficient LED downlight equipped with a Philips SLM Module. Available in 3 sizes: 180mm, 206mm and 226mm. IP44 set with frontglass available upon request. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out sizes** : Giro 180 Ø170 x H130mm  
 Giro 206 Ø190 x H132mm  
 Giro 226 Ø215 x H137mm

# TONDO



- Colour
  - 
  -
- Beam angle
  -
- Reflector
  -
- Led modules
  - 
  - 
  - 
  - 
  - 
  - 
  -
- Options
  - 
  - 
  - 
  - 
  - 
  -

LED downlight with smooth reflector. Low glare. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver. IP44 set with frontglass available upon request.

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out size** : Ø193 x H161mm  
**UGR** : <16


# CERCHIO



- Standard
- Dimmable
- Colour
- Beam angle
- Led modules
- Options

Fixed round recessed fixture with extra deep reflector and low glare. Standard Triac dimmable. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver. IP44 set available upon request.

**Lumen** : 800lm, 1400lm  
**CRI** : >80Ra, 90Ra  
**CCT** : 2700K, 3000K, 4000K  
**Cut-out size** : Ø76 x H118mm  
**UGR** : <15




# CERCHIO-L




- Colour
- Beam angle
- Led modules
- Options

Compact LED Downlight with a deep reflector. Low glare (UGR <13). Glass standard included (IP44). Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 4000K, 5700K  
**Cut-out size** : Ø155 x H160mm  
**UGR** : <12




# VISIONE<sup>360</sup>

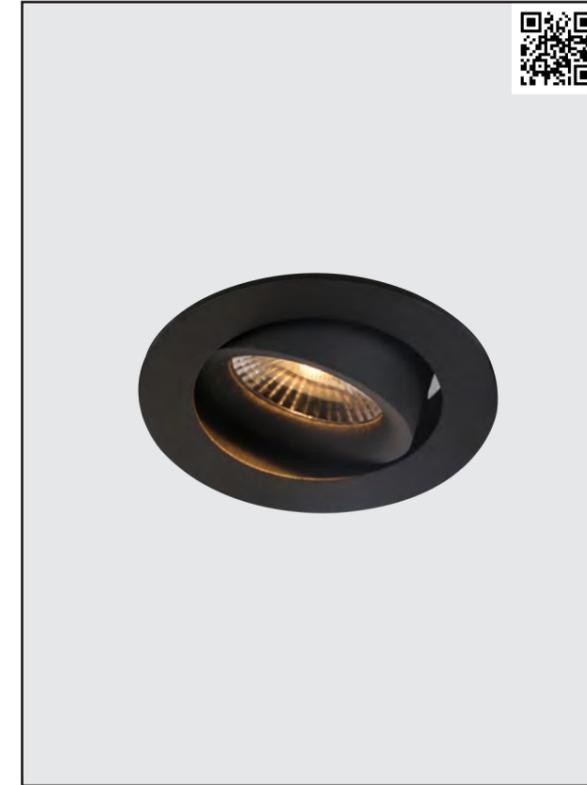

- Standard
- Dimmable
- Colour
- Beam angle
- Led modules
- Options

Compact gimbal recessed fixture. Equipped with a unique 360° turnable system and 30° tiltable. Standard equipped with Dim-to-Warm LED Module and Triac dimmable driver.

**Lumen** : 520lm  
**CRI** : >90Ra  
**CCT** : DTW (3000K - 1800K)  
**Cut-out size** : Ø76 x H50mm



# GIREVOLE

**Colour**

○ ● ●

**Beam angle**

Reflector Reflector Reflector Reflector

15° 24° 40° 60°

**Led modules**


Standard Premium Food DTW TW CRI98 HE+

● ★ 🍽️ 🌓 🌑 CRI 98 HE+

**Options**

Dimmable Dimmable Dimmable Casambi Glass Honeycomb Emergency unit

TRAC DALI 1-10V 🏠 🌐 🍯 🚶

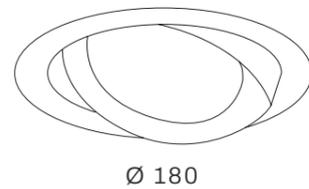

Gimbal recessed LED spot. Ideal for retail shops. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out size** : Ø170 x H110mm

# OCCHIO

**Colour**

○ ●

**Beam angle**

Reflector

90°

**Led modules**



Standard Premium Food DTW TW CRI98 HE+

● ★ 🍽️ 🌓 🌑 CRI 98 HE+

**Options**


Dimmable Dimmable Dimmable Casambi Emergency unit

TRAC DALI 1-10V 🏠 🚶

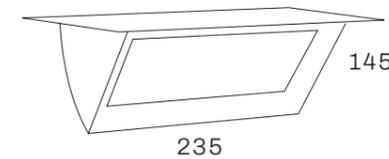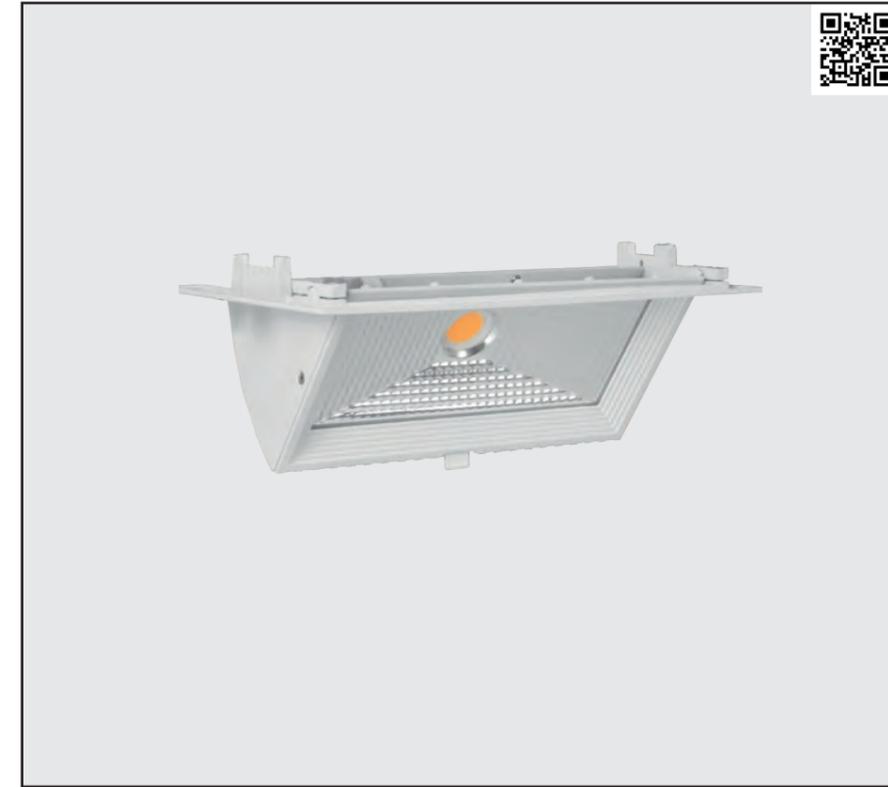

Recessed LED wallwasher with a very wide beam angle. Ideal for lighting wall presentations. Powder coating finish. Glass standard included. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out size** : L220 x W122 x H90mm

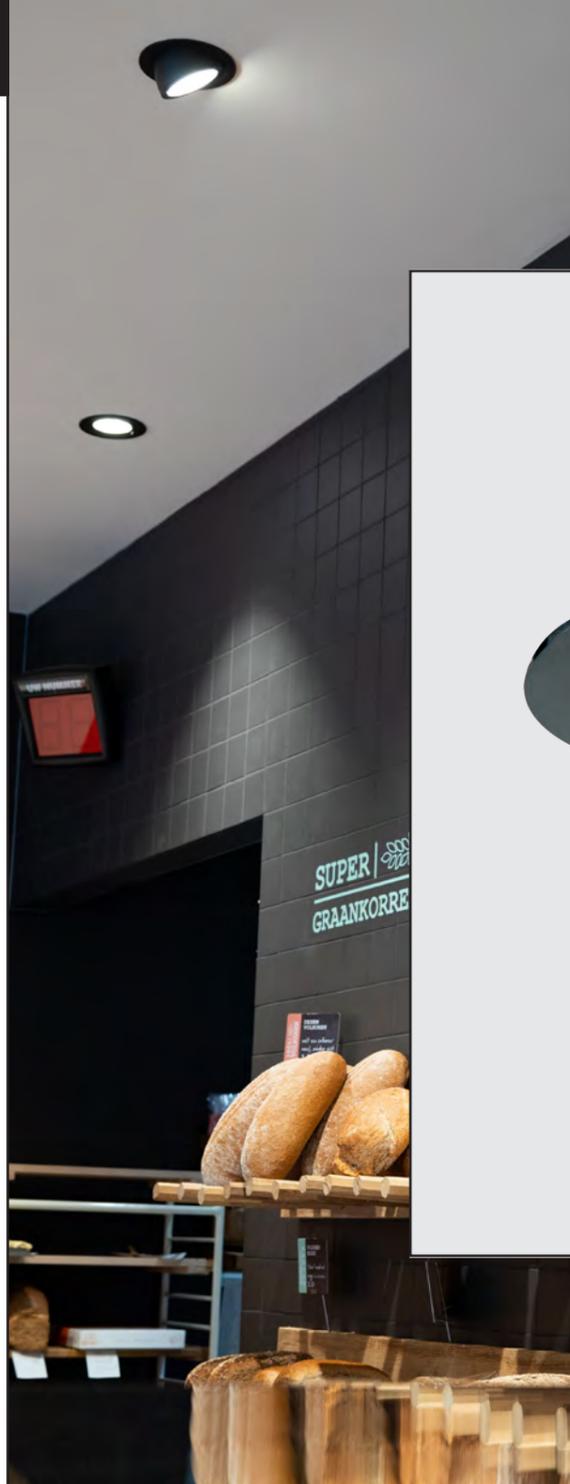

# CURVA

Curved recessed LED spot. Turnable and tiltable. Ideal for retailshops. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out size** : Ø162 x H141mm

**Colour**



**Beam angle**




**Led modules**



**Options**



Ø 172



# DOBLAR

Compact curved recessed LED spot. Turnable and tiltable. Ideal for retail shops. Glass standard included. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out size** : Ø130 x H114mm

**Colour**



**Beam angle**




**Led modules**




**Options**



Ø 140




# RONDIO

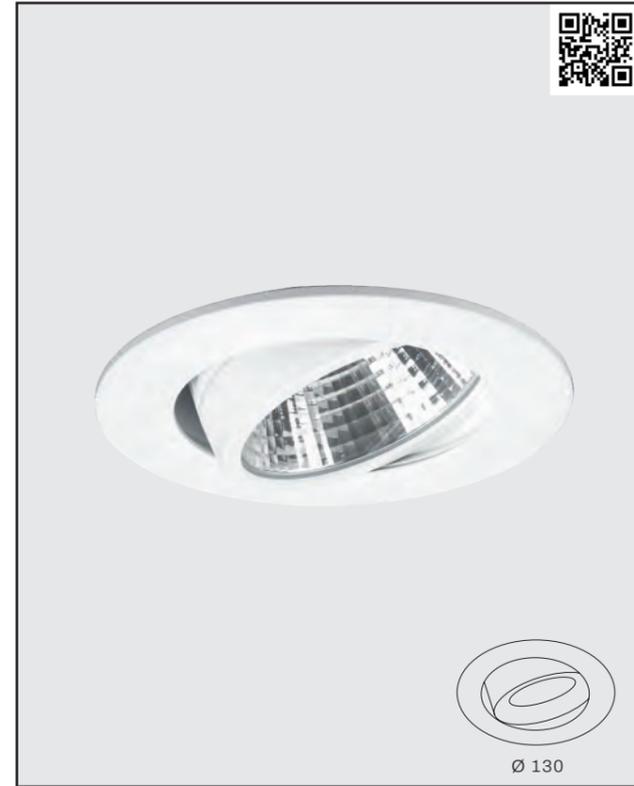

Round turn- and tiltable recessed LED spot. Glass standard included. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out size** : Ø115 x H94mm

# QUADRO

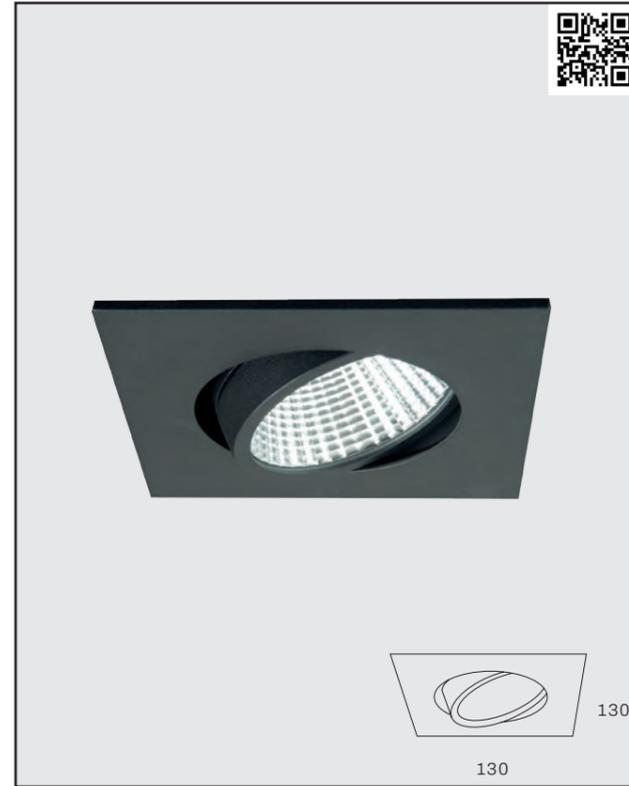

Square turn- and tiltable recessed LED spot. Glass standard included. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen** : 1100lm, 2000lm, 3000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out size** : Ø115 x H94mm

Colour

Beam angle

Reflector

Led modules

Options

# ETNA



Compact LED Downlight with a deep reflector. Powder coating finish. Glass standard included

**Lumen** : 1100lm, 2000lm, 3000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out size** : Ø105 x H113mm


Colour

Beam angle


Reflector

Led modules

Options

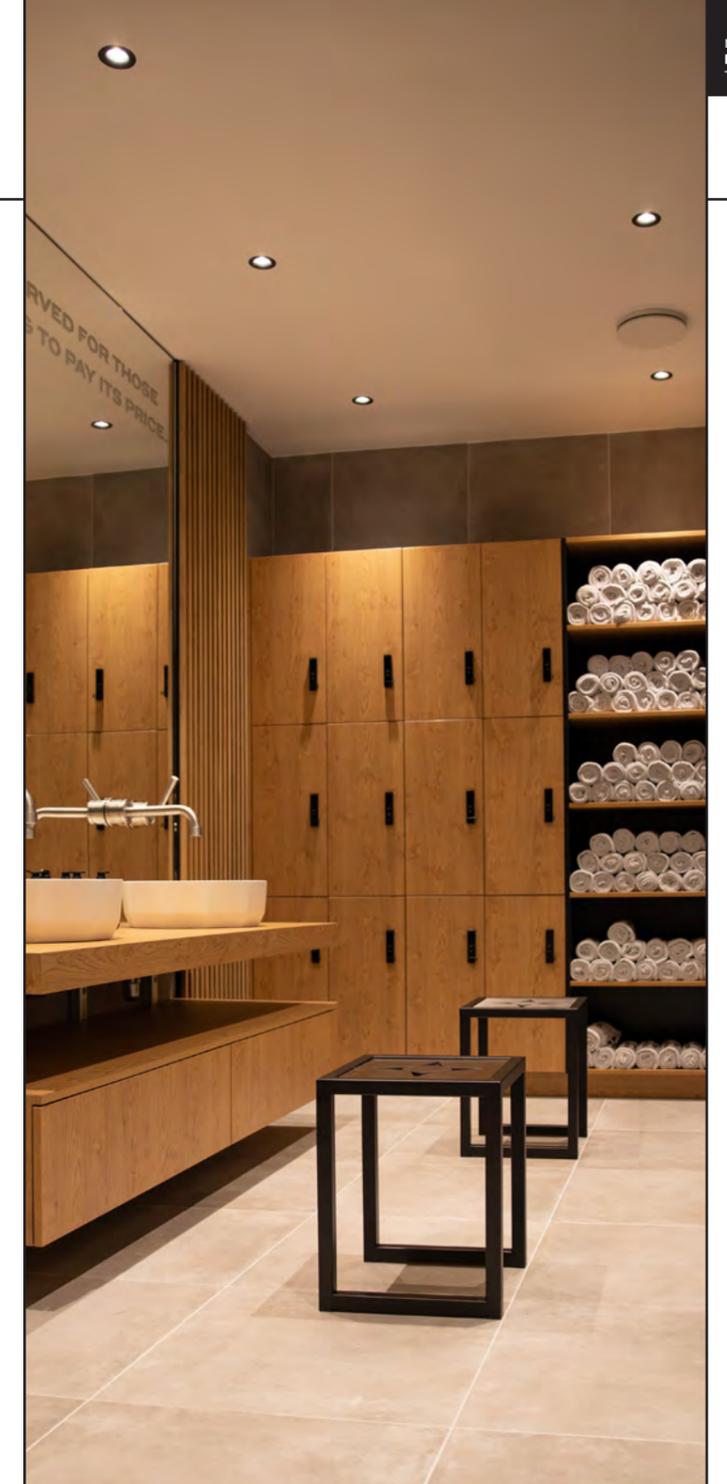


# TALEGGIO

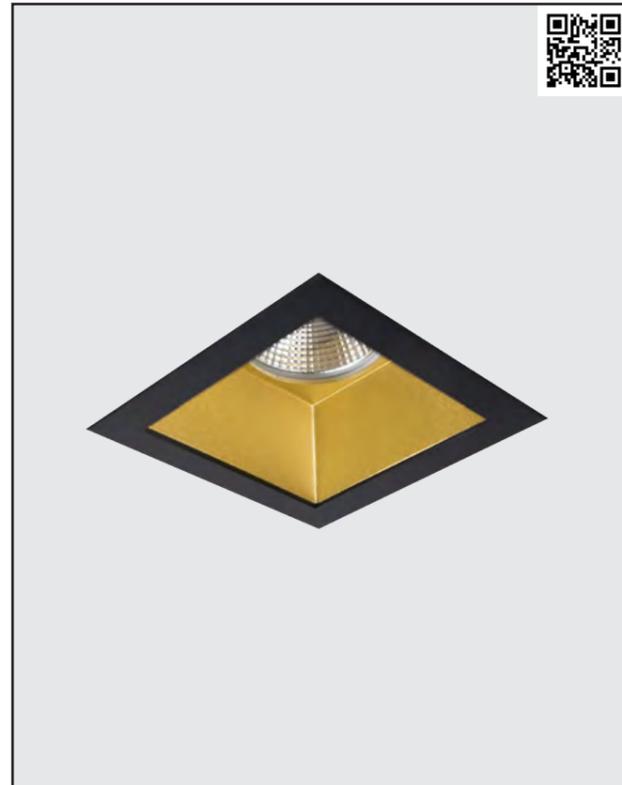

- Standard
- Dimmable
- Colour
  - 
  -
- Beam angle
  -
- Reflector
  -
- Led modules
  - Standard
  - Premium
  - HE+
    -
- Options
  - Dimmable
  - Dimmable
  - Casambi

Square recessed LED spot with a deep reflector (low glare). Available with a black or gold inside. Standard Triac dimmable.

**Lumen** : 800lm, 1400lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 4000K  
**UGR** : <13  
**Cut-out size** : L98 x B98 x H124mm




# VITTORIO



- Colour
  - 
  -
- Beam angle
  -
- Reflector
  -
- Led modules
  - Standard
- Options
  - Dimmable
  - Dimmable
  - Dimmable
  - Casambi

Economic square LED downlight equipped with a Philips Downlight Module.

**Lumen** : 1100lm, 2000lm, 3000lm  
**CRI** : >80Ra  
**CCT** : 3000K, 4000K  
**Cut-out size** : L190 x B190 x H134mm





# MOON 1-2 RETAIL


## MOON 1 RETAIL

Single recessed gimbal LED spot.  
Cut-out size: L165 x W165 x H145mm

## MOON 2 RETAIL

Double recessed gimbal LED spot.  
Cut-out size: L325 x W165 x H145mm

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K

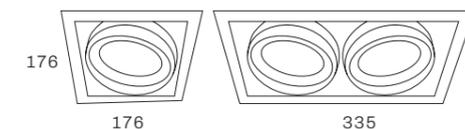

Colour



Beam angle



Led modules



Options





# MOON 3 RETAIL

## MOON 3 RETAIL

Triple recessed gimbal LED spot.  
Powder coating finish.

**Lumen** : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm  
**CRI** : >80Ra, >90Ra  
**CCT** : 2700K, 3000K, 3500K, 4000K, 5700K  
**Cut-out size** : L470 x W165 x H145mm

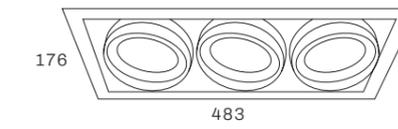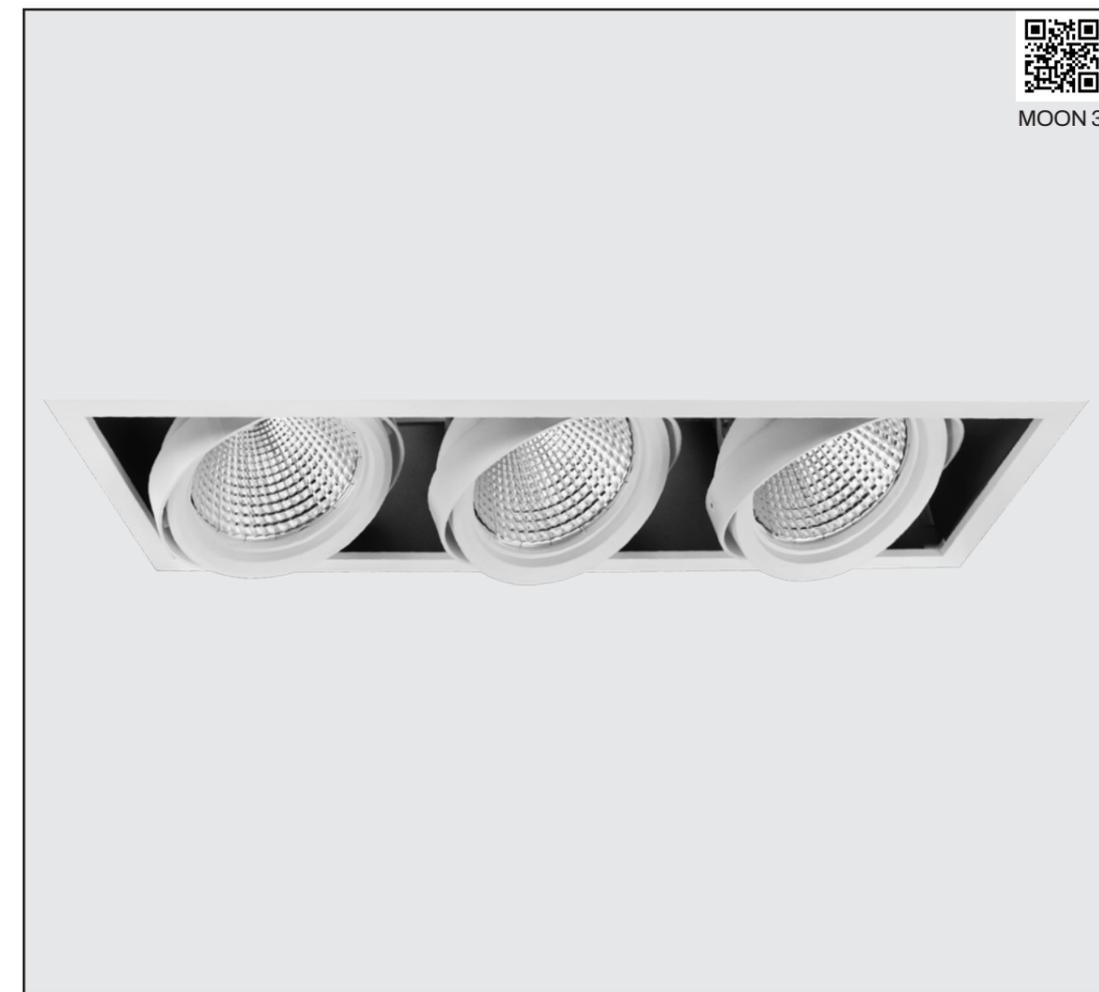

Colour



Beam angle



Led modules



Options





# MOON FRAME

Colour



Gimbal recessed spot with modern look. Tilt- and swivel rings. Suitable for domestic and hospitality applications. For shop lighting we recommend the Moon Retail.


## MOON 1 FRAME

Single recessed spot.  
Cut-out size: L165 x W165 x H111mm

## MOON 2 FRAME

Double recessed spot.  
Cut-out size: L350 x W165 x H111mm

Lamptype AR111 LED.  
Supplied without powersupply and lightsource, available upon request.

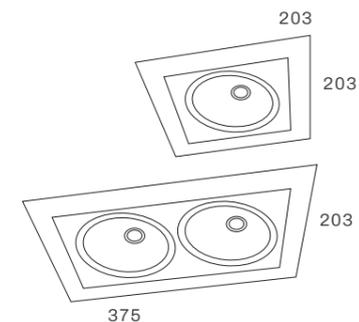

# MOON FRAMELESS

Colour



Frameless gimbal recessed spot with modern look. Tilt- and swivel rings. Suitable for domestic and hospitality applications. Plasterframe included. For shop lighting we recommend the Moon Retail.


## MOON 1 FRAMELESS

Single recessed spot.  
Cut-out size: L165 x W165 x H110mm

## MOON 2 FRAMELESS

Double recessed spot.  
Cut-out size: L315 x W165 x H110mm

Lamptype AR111 LED.  
Supplied without powersupply and lightsource, available upon request.

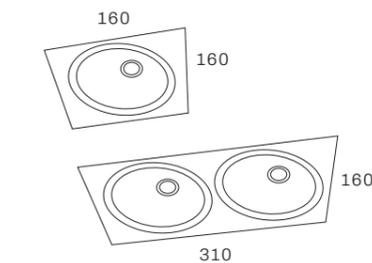

# LUNA FRAME




Gimbal recessed spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications.

## LUNA 1

Single recessed spot.  
Cut-out size: L120 x W120 x H125mm

## LUNA 2

Double recessed spot.  
Cut-out size: L240 x W120 x H125mm  
Lamp type AR70 LED.  
Supplied without powersupply and lightsource, available upon request.

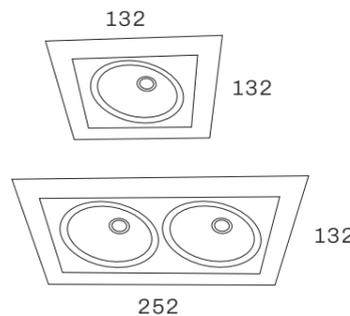

# LUNA FRAMELESS




Frameless gimbal recessed spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications. Plasterframe included.

## LUNA 1 FRAMELESS

Single recessed spot. Cut-out size: L120 x W120 x H120mm

## LUNA 2 FRAMELESS

Double recessed spot.  
Cut-out size: L225 x W120 x H120mm  
Lamp type AR70 LED.  
Supplied without powersupply and lightsource, available upon request.



# STAR FRAME



STAR 1



STAR 2



Colour



Gimbal recessed spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications.



## STAR 1

Single recessed spot.  
Cut-out size: L115 x W115 x H125mm

## STAR 2

Double recessed spot.  
Cut-out size: L210 x W115 x H125mm

Lamp type GU10 LED or 50mm LED module.  
Standard supplied without light source, available upon request.



237

# STAR FRAMELESS



STAR 1



STAR 2



Colour



Frameless gimbal recessed spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications. Plaster frame included.



## STAR 1 FRAMELESS

Single recessed spot.  
Cut-out size: L115 x W115 x H120mm

## STAR 2 FRAMELESS

Double recessed spot.  
Cut-out size: L215 x W115 x H120mm

Lamp type GU10 LED or 50mm LED module.  
Standard supplied without light source, available upon request.



210



# SURFACE MOUNTED

Surface mounted LED luminaires available in different designs and for different purposes, from decorative to high output solutions. Suitable for both domestic and professional projects. Made-in-Holland and equipped with the latest LED modules and drivers.



# SOTTILE 40 DUE



Double surface mounted compact spotlight with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and domestic projects. Also available in a Dim-to-Warm version.

**Lumen** : 2700K 2x700lm, DTW 2x500lm  
**CRI** : >90Ra  
**CCT** : 2700K, DTW (3000K - 2000K)

Standard


Dimmable




Colour



Beam angle



Led modules




**Choose your inner ring.**

# FAVO



Surface mounted 30° tiltable cardanic spotlight with powder coating finish. Standard IP44, equipped with a Dim-to-Warm LED module and Triac dimmable driver.

**Lumen** : 900lm  
**CRI** : >90Ra  
**CCT** : DTW (3000K - 1800K)



Standard


Dimmable



Colour



Beam angle




Reflector

# NUVOLA



Surface mounted IP44 spotlight with powder coating finish. Standard equipped with Dim-to-Warm LED module and Triac dimmable driver.

**Lumen** : 900lm  
**CRI** : >90Ra  
**CCT** : DTW (3000K - 1800K)




# STAR SURFACE



Gimbal surface mounted spot. Tilt- and swivel rings. Suitable for domestic and hospitality applications.

**STAR 1 SURFACE**  
Single surface mounted gimbal spot.




Colour



**STAR 2 SURFACE**  
Double surface mounted gimbal spot.

Lamp type GU10 LED.  
Supplied without light source,  
available upon request.



# CUBO UP/DOWN

Compact IP65 wall fixture, up/down. Standard triac dimmable. Beam angle can be adjusted manually (1°-120°). Suitable for indoor and outdoor use.

**Lumen : 2x 160lm**  
**CRI : >80Ra**  
**CCT : 2200K, 2700K, 3000K**

Standard

Dimmable





Colour



Led modules

Standard

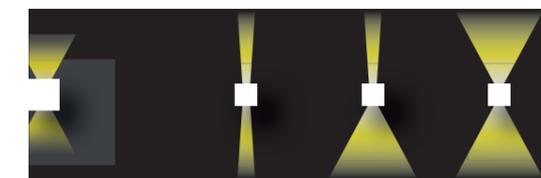


# SNELLO



- Colour**
- Beam angle**
- Led modules**
- Options**

Surface mounted tubular LED spot. Powder coating finish. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver. 3m Suspension kit available.

**Lumen : 1100lm, 2000lm, 3000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**




# ORIZZONTE



- Colour**
- Beam angle**
- Led modules**
- Options**

Economic surface mounted LED downlight with Philips Fortimo LED DLM and Philips Xitanium LED driver. Powder coating finish.

**Lumen : 1100lm, 2000lm, 3000lm**  
**CRI : >80Ra**  
**CCT : 3000K, 4000K**




# LIPARI



- Standard**
- Colour**
- Beam angle**
- Led modules**
- Options**

Surface mounted downlight with powder coating finish. Available in black (golden inner ring) and white (black inner ring). Standard Triac dimmable. Also available in a 3-circuit track version.


**Lumen : 1500lm**  
**CRI : >90Ra**  
**CCT : 2700K**




**INNOVATION**  
**NOVA**  
PROFESSIONAL LIGHTING

# PENDANT

Made-in-Holland Pendant LED luminaires available in different designs. From decorative to highly efficient luminaires with a high lumen-output and from hospitality to utility application, perfect to complete your project.

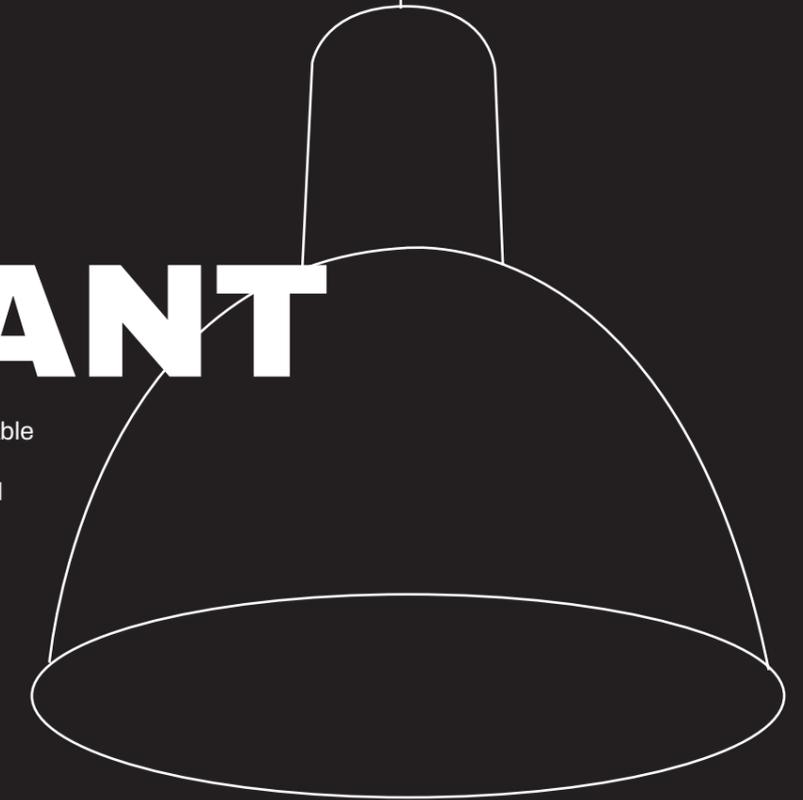

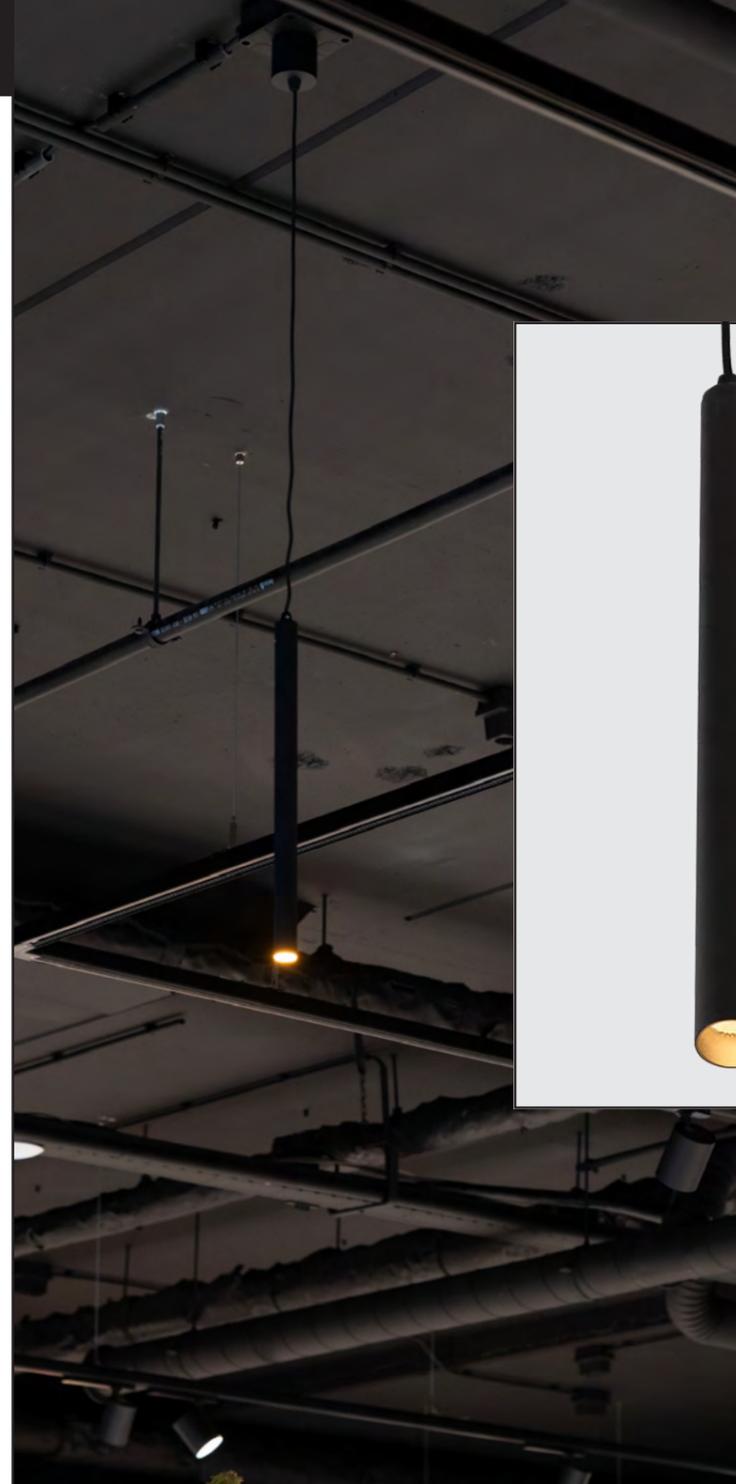

# SALINA

Decorative pendant in powder coating finish. Available in black (golden inner ring) and white (black inner ring). Standard Triac dimmable. Suspension length 2 m. Supplied with ceiling cup, also available in a 3-circuit track version.

**Lumen : 600lm**  
**CRI : >90Ra**  
**CCT : 2700K**

Standard

Dimmable



Colour



Beam angle



Led modules

Standard



400



Ø 26



# METEORA

PENDANT

Pendant version of the Meteora with powder coating finish. Available with decorative golden, black or white inner ring. Standard Triac dimmable, ideal to be used in hospitality and residential projects. Suspension length 3m. Supplied with ceiling cup, also available in 3-circuit track version.

**Lumen : 1100lm**  
**CRI : >90Ra**  
**CCT : 2700K, 3000K**

Standard

Dimmable



Colour



Beam angle



Led modules

Standard



Options

Dimmable



Casambi



165



Ø 60

# LUCEVARIA PENDANT



Linear pendant lighting (57cm, 113cm, 141cm) for the perfect utility lighting. Ideal to be used for desk and counter lighting. Supplied including suspension kit, suspension length 3m. Osram LED modules and driver inside.

**570mm : 1500lm**  
**1130mm : 3000lm**  
**1410mm : 3850lm**

**CRI : >80Ra**  
**CCT : 3000K, 4000K**

Colour



Led modules

Standard



Options


Dimmable



Dimmable



Casambi

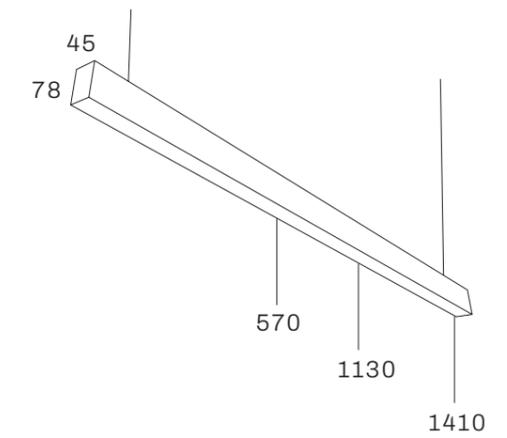

# ALTA



- Colour:
- Beam angle: Reflector
- Led modules: Standard Premium Food CRI98 HE+
- Options: Dimmable Dimmable Dimmable Casambi



LED Pendant in industrial look, produced in die-cast aluminium. Supplied with Ø410mm prismatic polycarbonate shade. Suspension length 3m. Supplied with ceiling cup, also available in a 3-circuit track version. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.


**Lumen : 1100lm, 2000lm, 3000lm, 4500lm, 6000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**

# RIVA



- Colour:

- Colour:
- Beam angle: Reflector
- Led modules: Standard Premium HE+ DTW
- Options: Dimmable Dimmable Casambi



Vintage crafted pendant in matt black and white inside. Equipped with an E27 socket and 3m black fabric wire.

**Supplied without lightsource, available upon request.**

# ROSWELL



- Colour:
- Beam angle: Reflector
- Led modules: Standard Premium HE+ DTW
- Options: Dimmable Dimmable Casambi



Industrial crafted LED pendant in vintage black outside and matt white inside. Suspension length 2m. Supplied with ceiling cup, also available in a 3-circuit track version. Equipped with Philips Fortimo LED module and Philips Xitanium LED driver.

**Lumen : 1100lm, 2000lm, 3000lm**  
**CRI : >80Ra, >90Ra**  
**CCT : 2700K, 3000K, 3500K, 4000K, 5700K**



IT ALL  
STARTS  
WITH LIGHT

NO Light  
without  
A PLAN

# INTER NOVA

Rithmeesterpark 21 4838 GZ Breda The Netherlands  
+ 31 (0) 76 520 5566 [info@internova.nl](mailto:info@internova.nl)